

Charred.O&M

TIMBER RANGE



INNERSPACE

CESHIRE

Specification.

Charred

Standard composition

Charred.light

Real Siberian Larch
Char level **1** or **2**
Thickness: 20mm

Charred.heavy

Real Siberian Larch
Char level **3** or **4**
Thickness: 20mm

Charred.crackly

Real Accoya
Char level **5**
Thickness: 20mm

Dimension

Made to order

Weight

Made to order

Suitability

Walls, panels, furniture

Fire

Planks can be fire rate to Euro class B
on request


Specification Choices.

Charred


As well offering standard plank widths. You can choose bespoke widths and depths to suit your project requirements.

Standard


Planks available in 70mm(W)

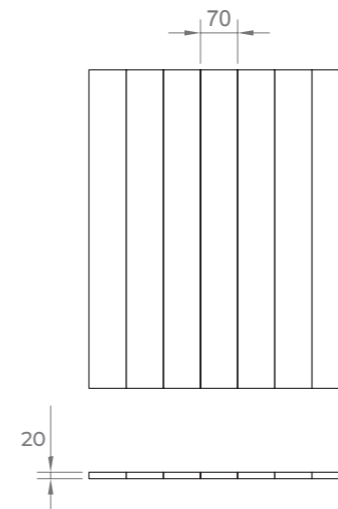

Planks available in 140mm(W)

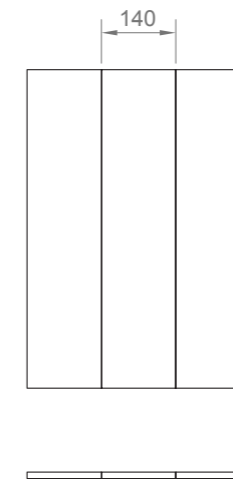

Planks available in 70mm(W) + 140mm(W)

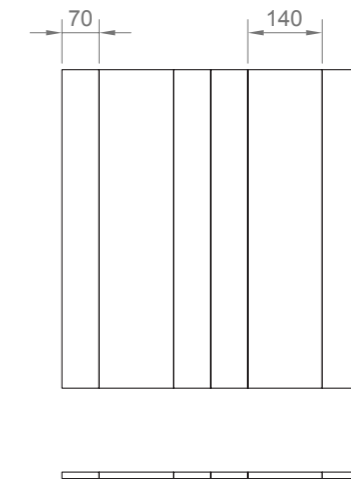

Installation.

Options

Screws

Screwed straight into the substrate wall.

Nails

Nail pin straight into the substrate wall.

Adhesive

Glued straight onto the substrate wall.

Maintenance.

Options

Dusting

Light dusting should be done to remove any debris that has settled.

We'd love to hear from you.

01270 625043

office@innerspacecheshire.co.uk

www.innerspacecheshire.co.uk



INNERSPACE

CHESHIRE