



INNERSPACE

CHESHIRE

**BRICK
BRICKWALL
O & M**

SPECIFICATION

Introduction

Innerspace Brick panels are cast from plaster of paris with a hessian interlayer for stability. They are suitable for internal use.

Specification

London Brick, Raw Brick & Coloured

Plaster moulded panels on hessian backing


Height: 940mm Width: 990mm Thickness: 10mm

Weight: 5Kg

INSTALLATION

Installation

Step 1 - First trim the sheets so they interlock using a Sharp Stanley knife (see below) all the panels are moulded the same. Keep them the same way up or the interlock will not work.

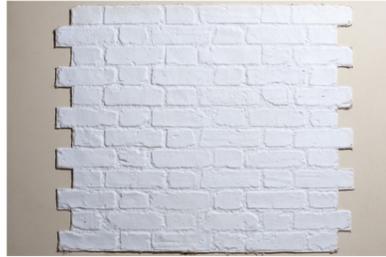

Step 2 - You will need to create a straight edge for your starting panel. Use a ruler as a marker and draw a straight line down one side of the panel.

Step 3 - Using a Stanley knife or a fine tooth saw cut along your marked line to give you a straight edge.

Step 4 - Place your cut panel onto the wall at one end and mount using a strong form of adhesive, screws or staples. (Note: staples can only be used when applying faux brick to a stud or plastered wall)

Step 5 - You can now slot your second panel into the panel attached to the wall and repeat this process systematically until the wall is covered.

Step 6 - Once the surface is covered with the panels fill in the joints using an acrylic white mastic or plaster.

Step 7 - Then brush the joints using a wet thin paintbrush.

Step 8 - Allow the mastic/plaster to dry before moving onto step 9

Step 9 - For London brick only – Once the joints are dry, brush over the base / mortar colour provided using a thin brush. Once this paint has dried use a wet brush to apply the age / touch-up colour provided to the joints. Please note; this is a thin coat and really only a wash of colour. Whilst wet dab with a rag or a sponge until the joints are blended in with the surrounding panels.

You can call to discuss with our technical team if you prefer 01270 625 043

MAINTENANCE

Maintenance

The cleaning of the panels can be maintained by using a damp cloth.

Raw - Stubborn stains can be painted over using a white standard paint.

Coloured – Please use touch up paint provide. In the unlikely event of the panels getting damaged once installed they are easily touched up by applying plaster or a decorator's caulk once dried apply touch paint supplied.

ENVIRONMENT

Environment

Innerspace Brick panels are plastic-free and use low VOC materials for both their manufacture and installation (all water based adhesive, plaster and paint)

Their modular size allows for minimal wastage.

They are made in Britain so shipping is minimised.

We'd love to hear from you...

01270 625 043

Office@innerspacecheshire.co.uk

www.innerspacecheshire.co.uk